

DESCRIPTION

Armaş “EL” model valve is the hydraulic control valve operated by line pressure and designed to ensure opening/closing process by means of built-in 3/2-way solenoid pilot valves controlled remotely with electric signal. Electric signal for solenoid pilot valves is ensured by means of a control device, time relay, main switch and PLC control units etc. Opening/Closing process may be realized easily thanks to manual control on solenoid pilot valve. Depending on desire, 24V AC 50Hz/60Hz or 12V DC, 9V DC LATCH and 12V DC latch normally open (N.O.) or normally closed (N.C.) solenoid coils may be used on main valve.

PURCHASE SPECIFICATIONS

The valve will be diaphragm actuated disc closing automatic hydraulic control valve which works with line pressure. Double-chamber diaphragm actuator provides quicker and non-impact opening/closing thanks to disc-closing valve design and prevents blockage by showing less sensitivity against solid substances within fluid.

CONTROL SYSTEM COMPONENTS

- 1 Ball Valve
- 2 In-line Finger Filter
- 3 Plug
- 4 Solenoid Pilot Valve

QUICK SIZING


Valve size same as main line or one size smaller.
Maximum flow speed for continuous operation 5.5 m/sec
(18 ft/sec)

ORDER INFORMATION

Please submit following information to our sales department while ordering.

Maximum flow rate	: m³/h	Valve connection type	: ---
Maximum network/line pressure	: bar	Electric voltage value to be used	: volt
Main line size	: mm		

TYPICAL APPLICATION

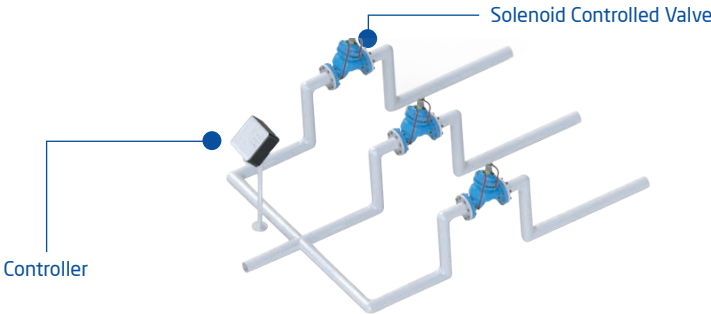

Armaş Solenoid Controlled Valves can be used with a local control unit or advanced automatin systems.